

This presentation should not be considered a final statement of NIOSH policy or of any agency or individual who was involved. This information is intended for use in advancing knowledge needed to protect workers. Comments regarding this presentation may be submitted to the NIOSH Docket Office.

Environmental and Rough Handling Durability Challenge Tests

Mr. Frank Palya, NIOSH

29 APR 2003



Project Overview

- Purpose of Tests
- Goal
- General Assumptions
- Type of Durability Test
 - Assumptions
 - Rationale for the Test

Project Overview Project Overview

- **Purpose of Tests:** To ensure that integrity is integral to the design and packaging of the CBRN Escape Respirator because of the One-Time Use Application.
- **Goal:** To ensure APR provides adequate respiratory protection after being subjected to potential environmental and normal transportation storage conditions by the user.



General Assumptions

- Tests represent conditions induced by the user that a CBRN Escape Respirator may experience from the point of issue.
- CBRN Escape Respirator will be subjected to the test conditions in the “Ready-to-Use” Configuration, individual unit pack.
- CBRN Escape Respirator individual unit pack will remain sealed until use.
- Non-industrial use scenario – for CBRN emergency use only.



Type of Environmental Test

- High Temperature: 71 °C (160 °F),
Constant; MIL-STD-810F, Method
501.4.
- Duration: 5 weeks
- Assumption: Simulates Solar Loading
Representative of Climatic Conditions in
southwest U.S.
- Rationale: Meteorological Data obtained for
Phoenix, AZ from ASU and NOAA; factored
in Inducement Factor from MIL-STD-810F

Type of Environmental Test

- Low Temperature: -31°C (-24°F), Constant; MIL-STD-810F, Method 502.4.
- Duration: 3 Days
- Assumption: Simulates outside storage in the U.S. Basic Cold Region.
- Rationale: Representative of minimum temperature in U.S. intermediate zones per MIL-STD-810F (Basic Cold); Duration is minimum 810F recommended exposure period.


Type of Environmental Test

- Humidity: 31 °C (88 °F) to 41 °C (105 °F), at 88% - 59% RH, MIL-STD-810E, Method 507.3, Figure 507.3-I (cycle 1), Natural Diurnal Humidity Cycle.
- Duration: 5 Days (“quick look”)
- Assumption: Represents natural temperature humidity profile in humid regions of U.S. per MIL-STD-810E such cities as Miami, FL.
- Rationale: Duration is minimum 810E recommended exposure period.

Type of Transportation Test

- Vibration: MIL-STD-810F, Method 514.5, Vibration, Annex A, Category 4, Over U.S. Highways, Figure 514.5C-1, Unrestrained
- Duration: 3 Axes, 12 Hours per axis (36 hours total = 12,000 miles simulation)
- Assumption: replicates conditions of an unrestrained Respirator stored in a vehicle driven over U.S. roadways.
- Rationale: To determine if there are any potential initial life cycle failures.


3 Axes of Vibration

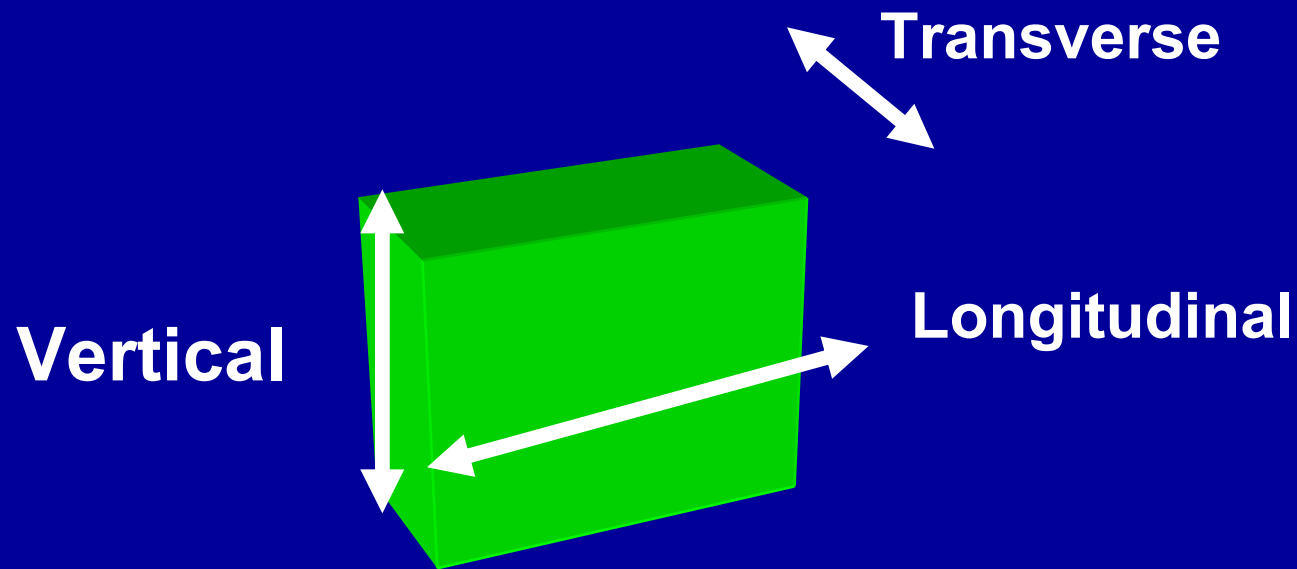

Rough Handling Test

- Drop Test: Height of 3 Feet
- Duration: Intent is to Drop Each Unit on each of the 3 Axes (1 Impact Surface per Axis)
- Assumption: To replicate several falls from a table or an automobile trunk
- Rationale: To ensure that integrity is integral to the design and packaging of the CBRN Air-Purifying Escape Respirator

Axes of Drops

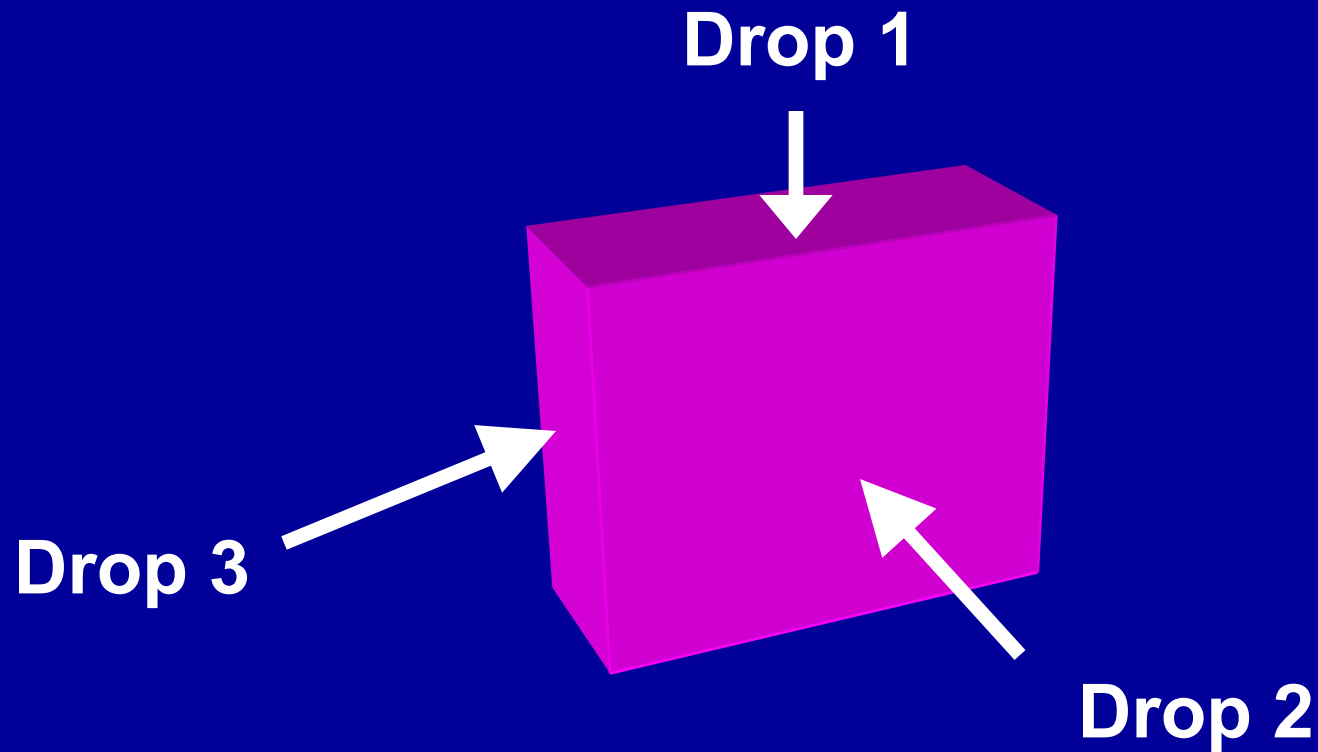

Durability Test Matrix: Environmental, Transportation and Drop Tests

Test	Test Method	Test Condition	Duration
Hot Constant ●	MIL-STD-810F, 501.4	71 °C (160 °F), Constant	5 Weeks
Cold Constant	MIL-STD-810F, 502.4	Basic Cold, -32 °C (-24 °F), Constant	3 Days
Humidity	MIL-STD-810E, 507.3	Realistic, Natural Cycle Humidity Profiles in the U.S.	5 Days “quick look” Mil-Std-810E Table 507.3-II
Transportation Vibration	MIL-STD-810F, 514.5	U. S. Roadway Vibration, Unrestrained	12 hours/axis, 3 Axes; Total Duration = 36 hours = 12,000 miles
Drop	Adopted from NIOSH, CBRN Full Facpiece Gas Mask	Height of 3 Feet	1 Drop on each of the 3 Axes per Unit